

PELICAN™ 3345
LED FLASHLIGHT

COMM/GOV DIVISION



SINCE 1976



SHIFT GEARS
WITHOUT
SHIFTING GEARS

THE FIRST SELF DRIVING FLASHLIGHT

INTEGRATED CLIP FOR
HANDS-FREE LIGHTING

FULL TIME BATTERY
LEVEL INDICATOR

CLASS I, II, III,
DIVISION 1 CERTIFIED

VARIABLE
LIGHT
SENSOR


SPOT BEAM

FLOOD BEAM



**Pelican™ 3345 LED flashlight with Variable Light Sensor:
The first intrinsically safe flashlight that automatically adjusts brightness.**

It has a mind of its own. The Variable Light Sensor in the new Pelican™ 3345 LED flashlight examines the ambient light/proximity and instantly adjusts its lumens to the most effective level. Now you can read pressure gauges close up or throw light hundreds of feet away - without hassling over manual power settings. The Variable Light Sensor also makes the Pelican™ 3345 LED flashlight one of our most energy efficient flashlights, preserving power and stretching battery life.

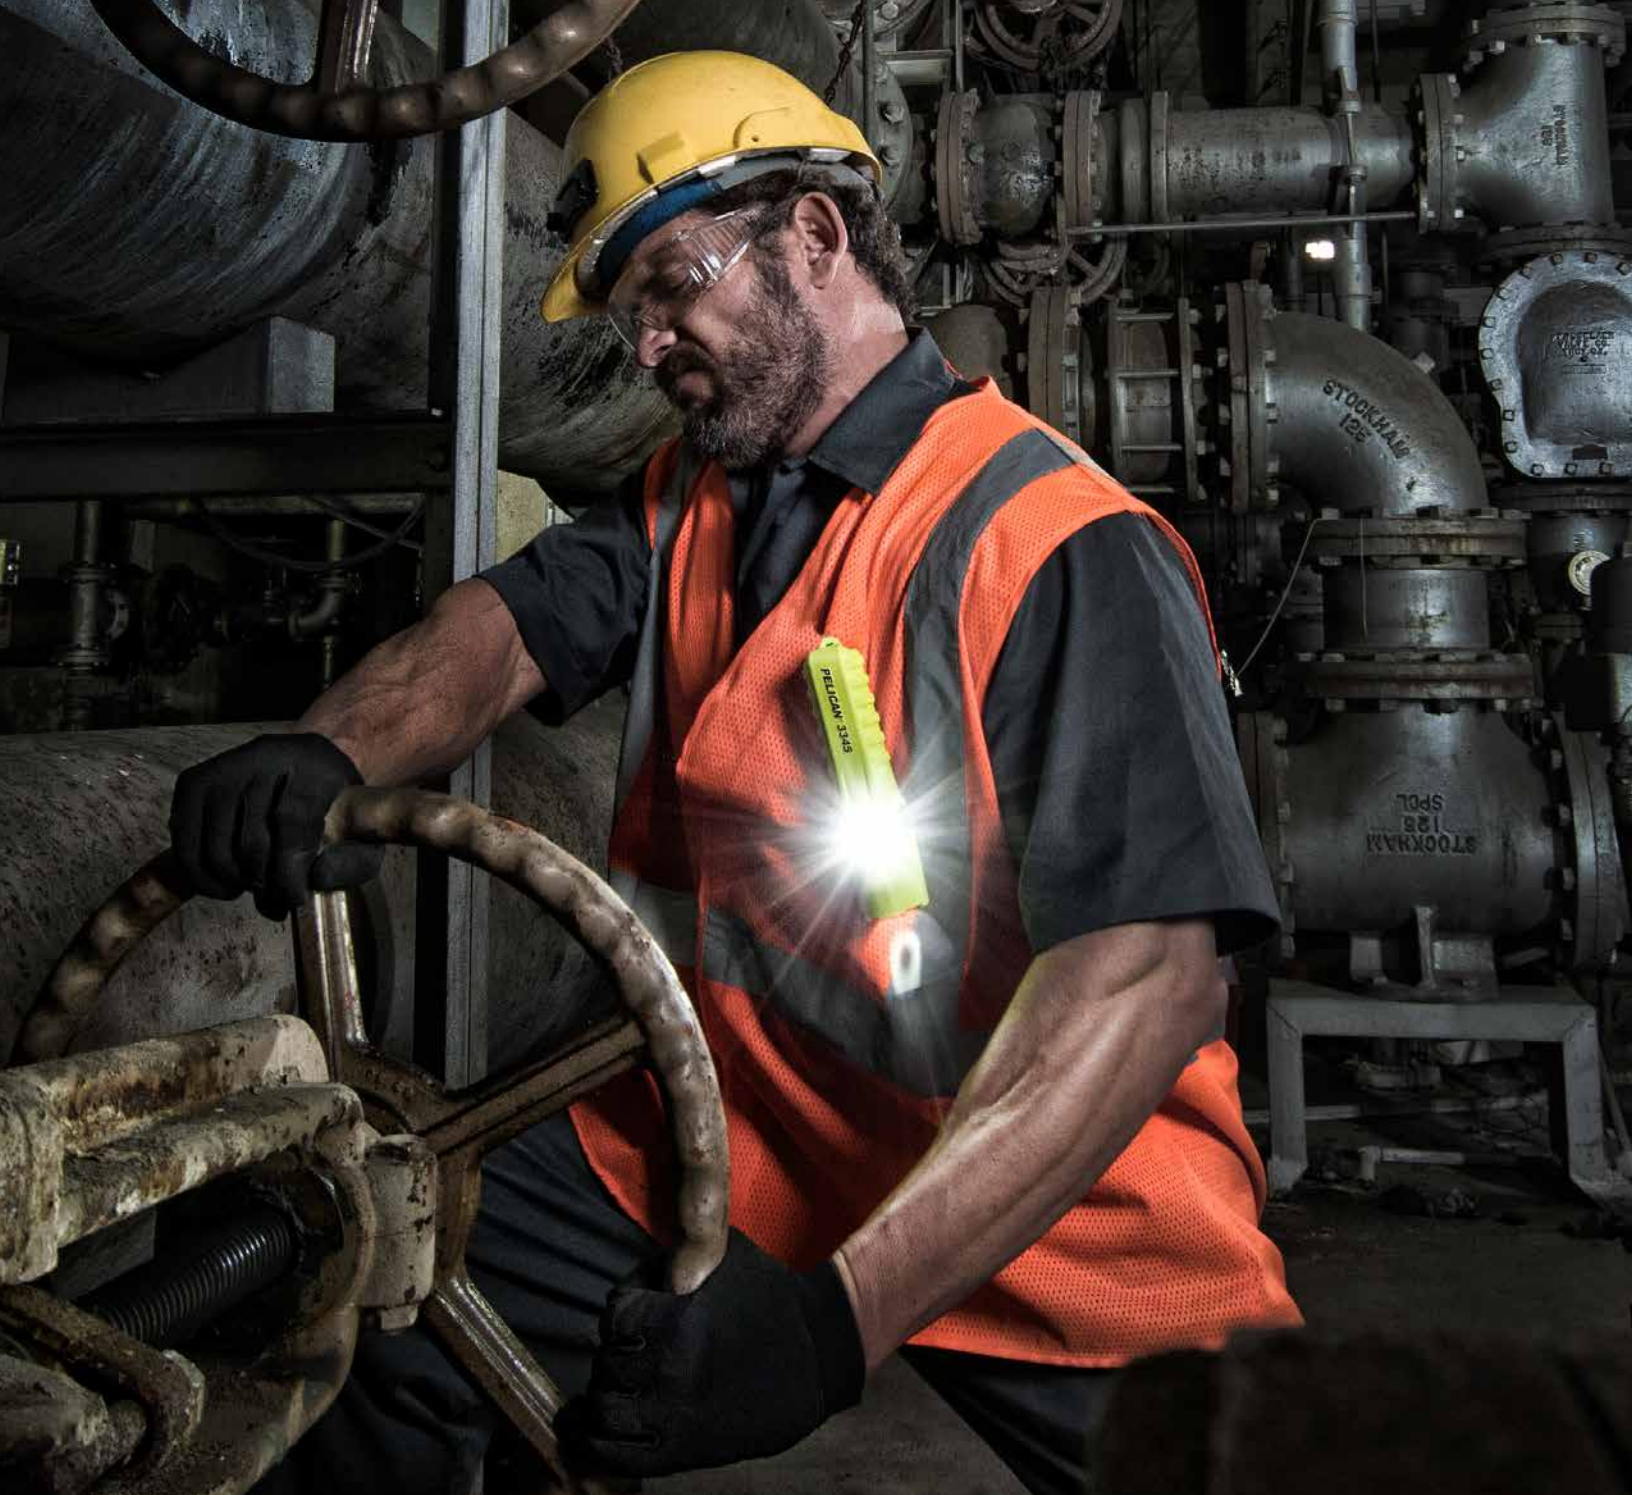

HANDS-FREE LIGHTING

Think Swiss utility knife, but in a flashlight version. The Pelican™ 3345 LED flashlight works as a standard flashlight or a hands free flashlight. Just clip the Pelican™ 3345 LED flashlight to a safety vest and switch to **flood beam** mode to illuminate your work area with **117 LUMENS** of bright LED light. And, when the job is complete, leave it on a safety vest or clip it to a utility belt to stow away for the next job.



SAFETY CERTIFIED/ BATTERY LEVEL INDICATOR




Certified with **Class I, II, III, Division 1 /IECEx ia certificates**, you can light up work areas where gases and vapors are present and know when to replace the batteries with the **full time battery level indicator**. The Pelican™ 3345 LED flashlight gives you the confidence to work in hazardous locations and never keep you guessing in the dark.



DOWN/FORWARD DUAL BEAMS

See trip hazards and the path ahead simultaneously. Dual beam technology gives the Pelican™ 3345 LED flashlight the power to light up your work area in two directions: The **spot beam** illuminates everything in front and the **flood beam** illuminates everything below. With **280 lumens** of combined beam brightness, the Pelican™ 3345 LED flashlight multiplies workplace safety.

PELICAN™ 3345 LED FLASHLIGHT SPECIFICATIONS

PELICAN™ 3345 LED FLASHLIGHT	
LIGHT OUTPUT	Up to 280 Lumens
RUN TIME	13 Plus Hours
MODES	Spot / Flood / Spot & Flood
BATTERIES	3 AA
IP RATING	IPX7
CERTIFICATIONS	Class I, Division 1 Class II, Division 1, Class III, Division 1, IECEx ia
COLORS	

Performance data is to FL 1 Standards. Visit Pelican.com for full specifications.



DISTRIBUTED BY:

For warranty details go to www.pelican.com/warranty
©2018 Pelican Products, Inc. All trademarks are registered and/or
unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or
affiliates. Part No. 0030-009-400 MR/18